

**BOLT TENSIONER PUMPS**




**AHP-BTU**

- Air driven hydraulic bolt tensioner pump
- Lightweight stainless steel protective frame for easy storage and transportation
- Infinitely variable output pressure and flow rate
- Fitted with glycerine filled vibra-gauge and quick connect high pressure outlet coupling
- Airline filter regulator lubricator unit fitted as standard

Operates from standard 7 bar air supply

Air consumption up to 56 scfm (1.59 m<sup>3</sup>/minute)


Working pressure 1500 bar

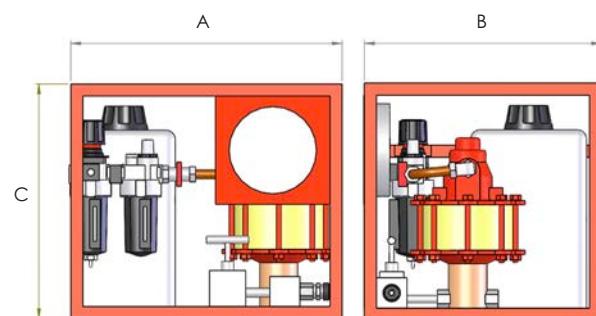

Model number	Usable oil capacity (litres)	Oil flow per stroke (cm <sup>3</sup> )	Outlet coupler	Air consumption	Weight (kg)	Dimensions (mm)		
						A	B	C
AHP275BTU	7.5	1.6	STFC4	28 scfm (0.79 m <sup>3</sup> /min)	20	450	395	395
AHP2-237BTU	7.5	6.1	STFC4	56 scfm (1.59 m <sup>3</sup> /min)	24	450	390	465

**HPX-BTU**

- Manually operated high pressure bolt tensioning pump
- Usable oil capacity 1.2 litres
- Fitted with external pressure release valve and factory set safety valve
- Supplied with a dual scale pressure gauge and quick release outlet coupling
- Bespoke handle with ergonomic grip and mesh guard to protect gauge from accidental damage

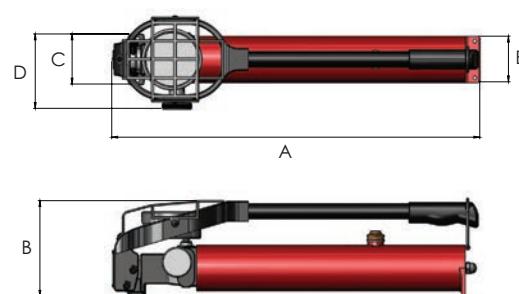

Model number	Usable oil capacity (litres)	Displacement per stroke (cm <sup>3</sup> ) 1 <sup>st</sup> stage	2 <sup>nd</sup> stage	Outlet coupler	Weight (kg)	Dimensions (mm)				
						A	B	C	D	E
HPX1500BTU	1.2	20	1	STFC4	6.5	615	161	84	125	76.5